

(19) World Intellectual Property Organization  
International Bureau



(43) International Publication Date  
24 January 2002 (24.01.2002)

PCT

(10) International Publication Number  
**WO 02/06791 A2**

(51) International Patent Classification<sup>7</sup>: **G01N 1/00**

(21) International Application Number: PCT/US01/17810

(22) International Filing Date: 31 May 2001 (31.05.2001)

(25) Filing Language: English

(26) Publication Language: English

(30) Priority Data:  
09/615,185 13 July 2000 (13.07.2000) US

(71) Applicant (for all designated States except US): **INTERNATIONAL BIOPRODUCTS INCORPORATED**  
[US/US]; 21312 30th Avenue Southeast, Bothell, WA 98021 (US).

(72) Inventors; and

(75) Inventors/Applicants (for US only): **WARD, N., Robert,**

Jr. [US/US]; 8123 232nd Street Southeast, Woodinville, WA 98072 (US). **BRIGHT, Geoffrey, S.** [US/US]; 406 240th Street Southeast, Bothell, WA 98021 (US).


(74) Agent: **VANDERZANDEN, Julie, C.**; Christensen O'Connor Johnson Kindness PLLC, Suite 2800, 1420 Fifth Avenue, Seattle, WA 98101 (US).

(81) Designated States (*national*): AE, AG, AL, AM, AT, AU, AZ, BA, BB, BG, BR, BY, BZ, CA, CH, CN, CO, CR, CU, CZ, DE, DK, DM, DZ, EC, EE, ES, FI, GB, GD, GE, GH, GM, HR, HU, ID, IL, IN, IS, JP, KE, KG, KP, KR, KZ, LC, LK, LR, LS, LT, LU, LV, MA, MD, MG, MK, MN, MW, MX, MZ, NO, NZ, PL, PT, RO, RU, SD, SE, SG, SI, SK, SL, TJ, TM, TR, TT, TZ, UA, UG, US, UZ, VN, YU, ZA, ZW.

(84) Designated States (*regional*): ARIPO patent (GH, GM, KE, LS, MW, MZ, SD, SL, SZ, TZ, UG, ZW), Eurasian

[Continued on next page]

(54) Title: SAMPLING DEVICE WITH SNAP-OFF HEAD AND METHOD OF USE

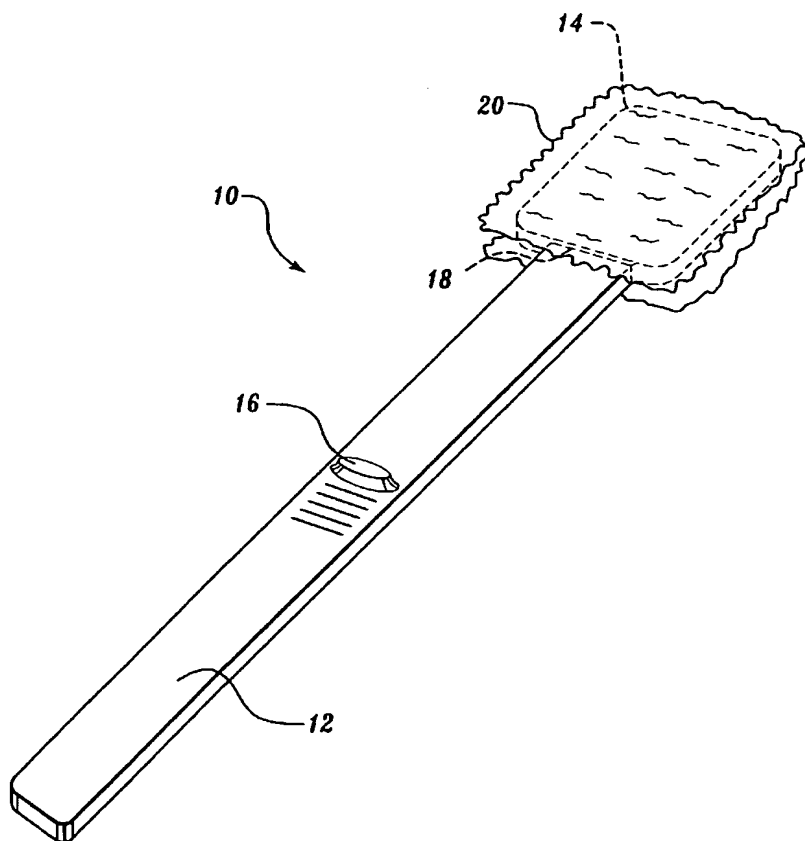

(57) Abstract: A sampling device (10) is provided having an elongate handle (12) with a distal paddle head (14). An absorbent material (20) is placed about the paddle head, and a score line (18) is located along the handle at a location adjacent the padded head. A method of use is provided in which the paddle head (14) and absorbent material (20) are inserted into a flexible wall sample bag. The head is then grasped from the exterior of the sample bag so as to avoid direct contact with the absorbent material. The handle is then broken away from the head at the handle score line. The absorbent material (20) is preferably sized to encompass the exposed score line after the paddle head (14) is snapped from the handle (12).

WO 02/06791 A2



patent (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European patent (AT, BE, CH, CY, DE, DK, ES, FI, FR, GB, GR, IE, IT, LU, MC, NL, PT, SE, TR), OAPI patent (BF, BJ, CF, CG, CI, CM, GA, GN, GW, ML, MR, NE, SN, TD, TG).

*For two-letter codes and other abbreviations, refer to the "Guidance Notes on Codes and Abbreviations" appearing at the beginning of each regular issue of the PCT Gazette.*

**Published:**

- *without international search report and to be republished upon receipt of that report*

## **SAMPLING DEVICE WITH SNAP-OFF HEAD AND METHOD OF USE**

### **Field of the Invention**

The present invention relates to applicator devices, and more particularly to a sampling device especially suited for use in sterile collection and having an applicator end of absorbent material.

### **Background of the Invention**

In the field of sterile collection, it is known to use swabs made of cotton, dacron or alginate to take microbiological samples. Such swabs usually include an swab stick handle that is relatively thin and somewhat bendable. After sampling, the swab is placed into a sterile test tube, plastic container, or other collection bag for transportation back to the laboratory and for later processing.

While this approach has been successful for the collection of clinical samples (e.g. throat swabs), it is less than ideal for collection of samples from floors, equipment surfaces and drains in an industrial setting, such as a food production plant. A first disadvantage is that known swabs are best suited for small sampling areas, such as a throat or body wound. Industrial surfaces are generally much larger. To account for the larger sample surface, some industrial sampling procedures use a sterile sponge that the analyst rubs across the sampling surface. The sampling sponge is held by a gloved hand or, sometimes, by sterile forceps. These sponges are effective for larger surfaces, but are susceptible to mishandling by the analyst, resulting in inaccurate results from accidental contamination of the sample.

A second disadvantage is microorganisms that colonize industrial surfaces can form strong attachments, called "biofilms", that require a certain amount of scrubbing in order to release them from their underlying surface. Consequently, it is

difficult to lift this biofilm by scrubbing a wide surface area using a relatively small swab having a bendable handle.

A third drawback is that an analyst taking a sample may contaminate the sample by introducing matter from the analyst's hand onto the applicator stick (the area held by the analyst). To address issues of purity, alternative swab devices have been developed for collection of clinical samples whereby a cap holds the swab and the analyst only holds the cap. The cap also serves to seal the transport container. Such an approach does improve the purity of the sample, but unfortunately requires extra plastic and an additional manufacturing step to produce.

In addition to the above problems, a large accumulation of collection bags with sample swabs located therein is cumbersome to transport and store. Overcrowding of the bags and various types of mishandling can occur in which the swab inadvertently punctures the collection bag and, consequently, compromises the quality of the sampled content.

Thus, a need exists for an improved surface sampling device for use in sterile collection. The ideal sampling device would be easy to use and cause minimal opportunity for accidental contamination by the analyst. The device would also be effective at sampling large areas and be capable of lifting an attached biofilm through the scrubbing action by the analyst. Finally, after the sample is taken, the sampling device can be transported back to the laboratory without puncturing the bag used to transport the device. The present invention is directed to fulfilling these needs and others as described below.

#### Summary of the Invention

In accordance with the present invention, a sampling device is provided having an elongate handle with a distal paddle head. An absorbent material is positioned about the paddle head, and a score line is located along the handle at a location adjacent the padded head. During use, the paddle head and absorbent material are snapped off of the elongate handle.

In accordance with other aspects of this invention, the absorbent material is sized to encompass the exposed score line after the paddle head is snapped from the handle. In one embodiment, the absorbent material is a single piece of generally rectangular absorbent material folded about the paddle head and adhered thereto. The head includes a distal edge and the absorbent material is folded about the distal edge. The handle and paddle head are integrally formed of a material such as polystyrene, polycarbonate, polypropylene, polyethylene, or ABS.

In one embodiment, the paddle head is approximately 0.2 cm thick, 3.2 cm wide, and 3.2 cm long; and the absorbent material is approximately 1.5 cm thick, 4.0 cm wide, and 8.0 cm long. The absorbent material overhangs the score line by an amount in the range of about 0.5 cm to about 1.0 cm, and is formed of a material such as cellulose, polyurethane, polyester, or gauze.

#### Brief Description of the Drawings

The foregoing aspects and many of the attendant advantages of this invention will become more readily appreciated as the same become better understood by reference to the following detailed description, when taken in conjunction with the accompanying drawings, wherein:

FIGURE 1 is a perspective view of one embodiment of a sampling device formed in accordance with the present invention;

FIGURE 2 is a side elevation view of the embodiment of FIGURE 1; and

FIGURE 3 is a perspective view of a preferred method of using the sampling device of FIGURE 1.

#### Detailed Description of the Preferred Embodiment

The present invention is a sampling device 10 for absorbing industrial chemicals, medical samples, waste material, and other such matter to be collected, transported, and later analyzed.

Referring to FIGURE 1, the sampling device 10 includes an elongate handle 12 with a distal paddle head 14. The head 14 is generally flat with rounded corners, and of a width greater than the width of the handle 12. In one embodiment, the handle 12 and paddle head 14 are integrally formed of a rigid material, such as polystyrene, polycarbonate, polypropylene, polyethylene, and ABS (Acrylonitrile-Butadiene-Styrene). The handle of FIGURE 1 includes a thumb stop 16 provided to improve the user's connection with the handle. The thumb stop 16 is located approximately mid-way along the handle length. Other types of grip-enhancing features may be used, e.g., roughened surfaces, finger indentations, etc.

A score line 18 is located along the handle at a location adjacent the padded head. A preferred score line includes first and second ends that are recessed inward. The handle portions adjacent these recessed ends are rounded so that when the paddle head is broken off (as described below) there are no exposed sharp corners on either of the resulting handle or paddle head pieces. This arrangement reduces the risk of a user cutting themselves on the handle portion after breaking it from the paddle, and

reduces the chances of a sharp corner on the paddle head poking a hole in the sterile sample bag and possibly compromising the sterility of the sample.

Referring to FIGURES 1 and 2, an absorbent material 20 is placed about the paddle head in such a manner as to encompass the score line. In one embodiment, this is accomplished by sizing the absorbent material sufficiently large so as to extend past the score line by an amount X. See FIGURE 2. The absorbent material is formed of an absorbent material, such as cellulose, polyurethane, polyester, or gauze.

In the embodiment of FIGURES 1-3, the absorbent material 20 is a single piece of generally rectangular absorbent material folded about the paddle head 14 and adhered thereto. The fold line of the material is located along the distal edge of the paddle head. The absorbent material overhangs the score line by an amount in the range of about 0.5 cm to about 1.0 cm. The paddle head 14 is approximately 0.2 cm thick, 3.2 cm wide, and 3.2 cm long; and the absorbent material is approximately 1.5 cm thick, 4.0 cm wide, and 8.0 cm long. Other arrangements are possible. For example, the fold line may be located along a side edge, or the absorbent material may be formed as a sock that slips over the paddle head.

Referring to FIGURE 3, during use, a user collects the specific matter (such as microorganisms) into the absorbent material. The head and saturated material is then placed in a sterile collection bag 22 or the like. In known sterile collection bags, a flexible plastic bag body 24 includes an upper opening 26 into which the sampling device may be inserted. The user grabs the paddle head (as wrapped by the bag body) and quickly snaps the head from the handle along the score line. The score line permits this to occur with relatively little effort. The user then extracts the handle, thus leaving only the paddle head and saturated absorbent material in the sterile collection bag. This arrangement allows a user to collect a surface sample via swabbing, and deposit the sample in a sterile flexible wall container without ever directly touching the absorbent material. In one embodiment, the handle includes a thumb stop located approximately mid-way along the handle. During use, the paddle head is inserted into the sample bag up to the thumb stop.

As will be appreciated, once the handle portion is snapped away from the paddle head, the oversized absorbent material surrounds the rough edges that may exist at the score line tear points along the detached head and, thus, successfully protects the sterile collection bag from puncture. In addition, because the handle is

broken off without direct contact, there is less chance of contamination by the user-- both at the head and the handle.

While the preferred embodiment of the invention has been illustrated and described, it will be appreciated that various changes can be made therein without  
5 departing from the spirit and scope of the invention.

The embodiments of the invention in which an exclusive property or privilege is claimed are defined as follows:

1. A sampling device comprising:
  - (a) an elongate handle with a distal paddle head;
  - (b) an absorbent material placed about the paddle head; and
  - (c) a score line located across the handle at a location adjacent the padded head; wherein during use, the paddle head and absorbent material may be snapped off of the elongate handle,
2. The sampling device according to Claim 1, wherein the absorbent material is sized sufficiently large to encompass the exposed score line after the paddle head is snapped from the handle.
3. The sampling device according to Claim 1, wherein the absorbent material is a single piece of generally rectangular absorbent material folded about the paddle head and adhered thereto.
4. The sampling device according to Claim 3, wherein the head includes a distal edge and the absorbent material is folded about the distal edge.
5. The sampling device according to Claim 4, wherein the paddle head is approximately 0.2 cm thick, 3.2 cm wide, and 3.2 cm long; and wherein the absorbent material is approximately 1.5 cm thick, 4.0 cm wide, and 8.0 cm long.
6. The sampling device according to Claim 1, wherein the absorbent material overhangs the score line by an amount in the range of about 0.5 cm to about 1.0 cm.
7. The sampling device according to Claim 1, wherein the absorbent material is formed of at least one of cellulose, polyurethane, polyester, and gauze .
8. The sampling device according to Claim 1, wherein the handle and paddle head are integrally formed.
9. The sampling device according to Claim 1, wherein the handle and paddle head are formed of at least one of polystyrene, polycarbonate, polypropylene, and acrylonitrile-butadiene-styrene.



10. The sampling device according to Claim 1, wherein the handle includes a thumb stop.

11. The sampling device according to Claim 1, wherein the score line ends are recessed from the edges of the handle and wherein the portions of the handle adjacent the score line ends are rounded.

12. A sampling device comprising:

(a) an elongate handle with an integrally-formed distal paddle head, the head includes an outer edge;

(b) a single piece of generally rectangular absorbent material folded about the paddle head outer edge and adhered thereto; and

(c) a score line located across the handle at a location adjacent the padded head; the score line including first and second ends recessed from the edge of the handle; the portions of the handle adjacent the score line ends being rounded; the absorbent material overhanging the score line by an amount in the range of about 0.5 cm to about 1.0 cm;

wherein during use, the paddle head and absorbent material may be snapped off of the elongate handle, the overhanging portion of the absorbent material encompassing the exposed score line after the paddle head is snapped from the handle.

13. A method of sampling microorganisms, comprising:

(a) wiping a surface with a sampling device having an elongate handle with a distal paddle head, an absorbent material placed about the paddle head, and a score line located across the handle at a location adjacent the padded head;

(b) inserting the paddle head with absorbent material into a flexible-walled sample bag;

(c) grasping the paddle head from the exterior of the sample bag;

(d) breaking the handle from the paddle head at the score line; and

(e) removing the handle from the bag.



14. The method according to Claim 13, wherein the handle includes a thumb stop located approximately mid-way along the handle; and wherein during use, the paddle head is inserted into the sample bag up to the thumb stop.

15. The method according to Claim 13, wherein the ends of the score line are recessed from the edge of the handle and wherein the portions of the handle adjacent the score line ends are rounded.


16. The method according to Claim 13, wherein the absorbent material is sized sufficiently large to encompass the exposed score line after the paddle head is broken from the handle.

17. The method according to Claim 16, wherein the absorbent material overhangs the score line by an amount in the range of about 0.5 cm to about 1.0 cm.

1/2

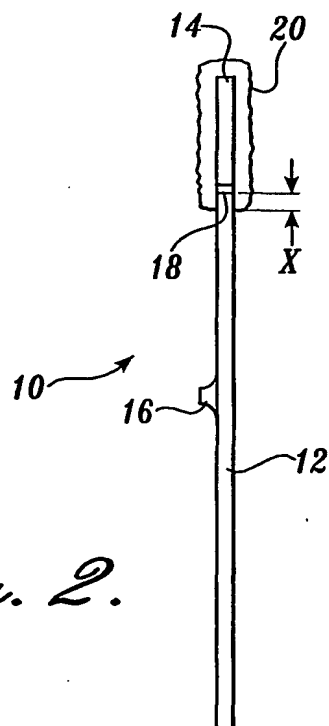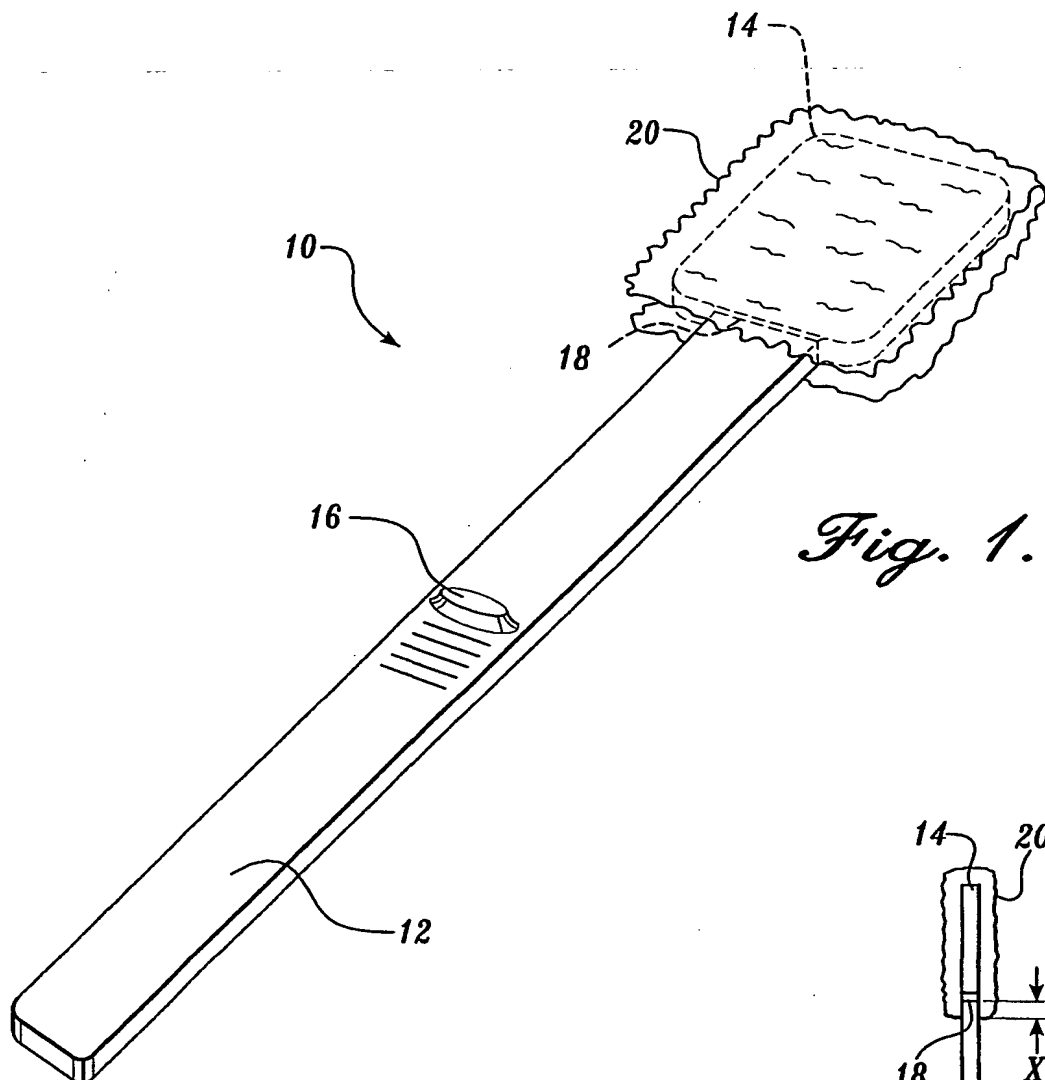

2/2

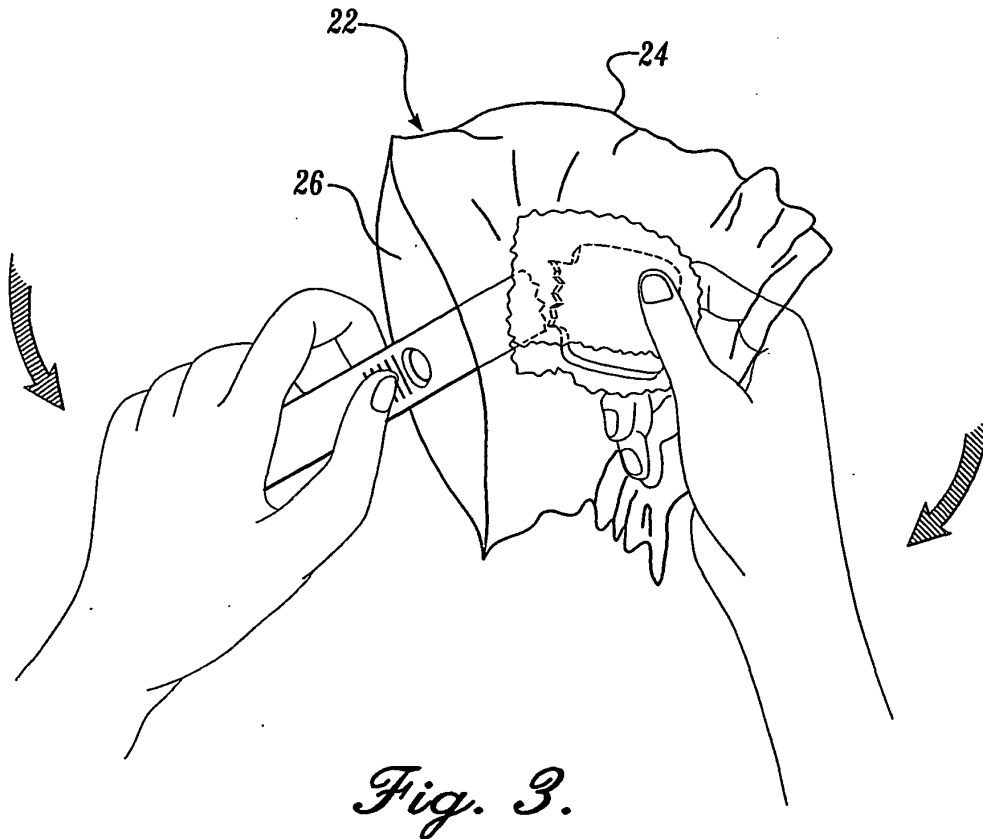

*Fig. 3.*

(12) INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

(19) World Intellectual Property Organization  
International Bureau



(43) International Publication Date  
24 January 2002 (24.01.2002)

PCT

(10) International Publication Number  
**WO 02/06791 A3**

(51) International Patent Classification<sup>7</sup>: **G01N 1/00**,  
33/52, C12M 1/30, B01L 3/00

(21) International Application Number: PCT/US01/17810

(22) International Filing Date: 31 May 2001 (31.05.2001)

(25) Filing Language: English

(26) Publication Language: English

(30) Priority Data:  
09/615,185 13 July 2000 (13.07.2000) US

(71) Applicant (for all designated States except US): **INTERNATIONAL BIOPRODUCTS INCORPORATED**  
[US/US]; 21312 30th Avenue Southeast, Bothell, WA  
98021 (US).

(72) Inventors; and


(75) Inventors/Applicants (for US only): **WARD, N., Robert, Jr.** [US/US]; 8123 232nd Street Southeast, Woodinville, WA 98072 (US). **BRIGHT, Geoffrey, S.** [US/US]; 406 240th Street Southeast, Bothell, WA 98021 (US).

(74) Agent: **VANDERZANDEN, Julie, C.**; Christensen O'Connor Johnson Kindness PLLC, Suite 2800, 1420 Fifth Avenue, Seattle, WA 98101 (US).

(81) Designated States (national): AE, AG, AL, AM, AT, AU, AZ, BA, BB, BG, BR, BY, BZ, CA, CH, CN, CO, CR, CU, CZ, DE, DK, DM, DZ, EC, EE, ES, FI, GB, GD, GE, GH, GM, HR, HU, ID, IL, IN, IS, JP, KE, KG, KP, KR, KZ, LC, LK, LR, LS, LT, LU, LV, MA, MD, MG, MK, MN, MW, MX, MZ, NO, NZ, PL, PT, RO, RU, SD, SE, SG, SI, SK, SL, TJ, TM, TR, TT, TZ, UA, UG, US, UZ, VN, YU, ZA, ZW.

[Continued on next page]

(54) Title: SAMPLING DEVICE WITH SNAP-OFF HEAD AND METHOD OF USE

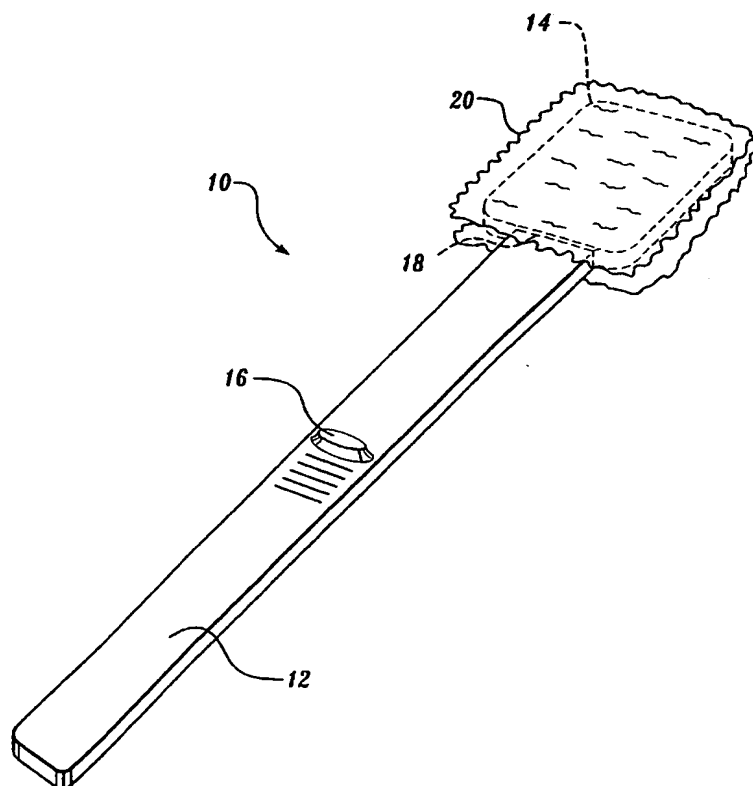

(57) Abstract: A sampling device (10) is provided having an elongate handle (12) with a distal paddle head (14). An absorbent material (20) is placed about the paddle head, and a score line (18) is located along the handle at a location adjacent the padded head. A method of use is provided in which the paddle head (14) and absorbent material (20) are inserted into a flexible wall sample bag. The head is then grasped from the exterior of the sample bag so as to avoid direct contact with the absorbent material. The handle is then broken away from the head at the handle score line. The absorbent material (20) is preferably sized to encompass the exposed score line after the paddle head (14) is snapped from the handle (12).

WO 02/06791 A3



(84) **Designated States (regional):** ARIPO patent (GH, GM, KE, LS, MW, MZ, SD, SL, SZ, TZ, UG, ZW), Eurasian patent (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European patent (AT, BE, CH, CY, DE, DK, ES, FI, FR, GB, GR, IE, IT, LU, MC, NL, PT, SE, TR), OAPI patent (BF, BJ, CF, CG, CI, CM, GA, GN, GW, ML, MR, NE, SN, TD, TG).

(88) **Date of publication of the international search report:**  
25 April 2002

*For two-letter codes and other abbreviations, refer to the "Guidance Notes on Codes and Abbreviations" appearing at the beginning of each regular issue of the PCT Gazette.*

**Published:**

- *with international search report*
- *before the expiration of the time limit for amending the claims and to be republished in the event of receipt of amendments*

## INTERNATIONAL SEARCH REPORT

Inter: Application No

PCT/US 01/17810

## A. CLASSIFICATION OF SUBJECT MATTER

IPC 7 G01N1/00 G01N33/52 C12M1/30 B01L3/00

According to International Patent Classification (IPC) or to both national classification and IPC

## B. FIELDS SEARCHED

Minimum documentation searched (classification system followed by classification symbols)

IPC 7 C12M B01L G01N

Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched

Electronic data base consulted during the international search (name of data base and, where practical, search terms used)

EPO-Internal

## C. DOCUMENTS CONSIDERED TO BE RELEVANT

Category *	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
X	GB 2 059 992 A (PIKE B R) 29 April 1981 (1981-04-29) figures 1-6 column 3, line 22 -column 3, line 37 ---	1,7-9,13
A	US 4 175 439 A (LAKER THOMAS L) 27 November 1979 (1979-11-27) abstract figures 2,4,6 ---	1-17
A	US 4 175 008 A (WHITE DOUGLAS J) 20 November 1979 (1979-11-20) figure 5 column 5, line 33 -column 5, line 44 ---	1,2,8
A	EP 0 420 450 A (BIONOR AS) 3 April 1991 (1991-04-03) figure 2 -----	1

☐ Further documents are listed in the continuation of box C.☒ Patent family members are listed in annex.

## \* Special categories of cited documents:

- \*A\* document defining the general state of the art which is not considered to be of particular relevance
- \*E\* earlier document but published on or after the international filing date
- \*L\* document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified)
- \*O\* document referring to an oral disclosure, use, exhibition or other means
- \*P\* document published prior to the international filing date but later than the priority date claimed

\*T\* later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention

\*X\* document of particular relevance; the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone

\*Y\* document of particular relevance; the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art.

\*&\* document member of the same patent family

Date of the actual completion of the international search

26 February 2002

Date of mailing of the international search report

07/03/2002

Name and mailing address of the ISA

European Patent Office, P.B. 5818 Patentlaan 2  
NL - 2280 HV Rijswijk  
Tel. (+31-70) 340-2040, Tx. 31 651 epo nl,  
Fax: (+31-70) 340-3016

Authorized officer

Tiede, R

# INTERNATIONAL SEARCH REPORT

Information on patent family members

International Application No

PCT/US 01/17810

Patent document cited in search report		Publication date	Patent family member(s)	Publication date
GB 2059992	A	29-04-1981	AU 539613 B2	11-10-1984
			AU 6319180 A	16-04-1981
			CA 1156542 A1	08-11-1983
			DE 3038282 A1	23-04-1981
			JP 56055198 A	15-05-1981
			SE 8007078 A	12-04-1981
			ZA 8006109 A	30-09-1981
<hr/>				
US 4175439	A	27-11-1979	NONE	
<hr/>				
US 4175008	A	20-11-1979	NONE	
<hr/>				
EP 0420450	A	03-04-1991	NO 893706 A	19-03-1991
			AT 131208 T	15-12-1995
			DE 69024014 D1	18-01-1996
			DE 69024014 T2	18-07-1996
			DK 420450 T3	22-04-1996
			EP 0420450 A1	03-04-1991
<hr/>				